
ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE

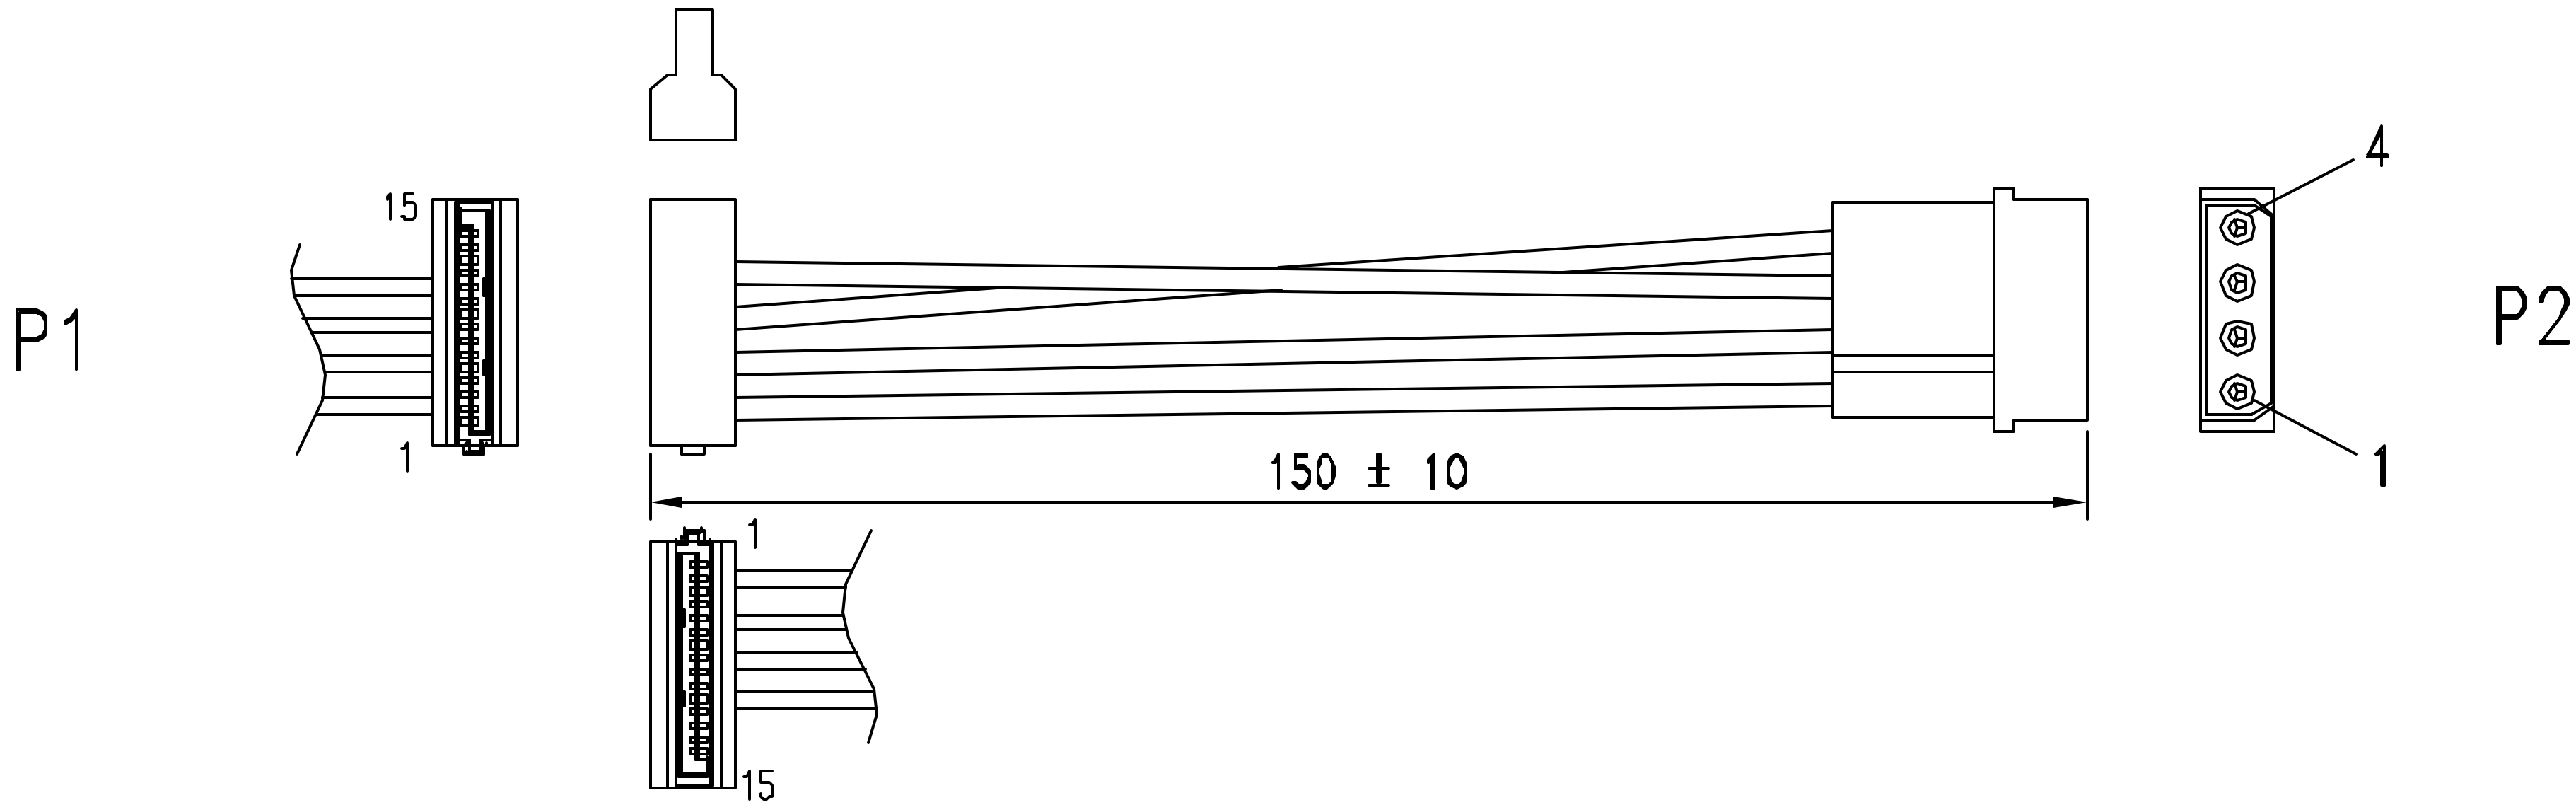

NOTE:

1. HOOK UP WIRE : UL1007 18AWG COLOR:YELLOW, BLACK, RED
2. CONNECTOR :
   P1 : 15 PIN SATA SOCKET SOLDER TYPE 15u" GOLD PLATED CONTACT
   P2 : 4 PIN MATE LOCK MALE .
   HOUSING: JWT P/N: C5081H0-4P
   TERMINAL: JWT P/N: C5081T0B-2 .
3. HOOD: P1: MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)
4. ELECTRICAL TEST: <1>100% OPEN SHORT & MIS WIRE TEST.
   <2>CONTACT RESISTANCE 3 Ohms MAX
   <3>INSULATION RESISTANCE 10M Ohms MIN
5. PACKING: EACH PC / POLYBAG.

P1		P2
1, 2, 3	YELLOW	1
4, 5, 6	BLACK	2
7, 8, 9	RED	4
10, 11, 12	BLACK	3

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Sheet 1/1

equip®

Internal Power Cable
S/ATA angled -> 5,25"

2009 V.01